On the JETIBOX LCD Display shown Full Menus Duplex EX Receivers:

Das vom LCD-Bildschirm der JETIBOX angezeigte Menü der Empfänger Duplex EX:

Receiver Type
Duplex R18 EX

MeasureOrSetting
measure

Volt Min/Act/Max
4.80/5.00/5.00 V

Signal level Rx
Ant1: 9 Ant2: 9

Pairing

for pairing pres Up

MeasureOrSetting
Main setting

Signal Fault Delay
1.5 s

0.2s - 5s
step 0,1s

Volt ACT/ALARM
5.0V / 4.5V

actual voltage
alarm voltage

Output Period
20 ms

8 ms - 30 ms
step 1 ms

RX mode
normal

normal mode
clone mode

Menu Display
Full

Full
Reduced

RX: ....
TX: ....

RX: ID number
TX: ID number
of paired TX

MeasureOrSetting
Channel Set

SetInputChannel
A=1.50 CH1

CH1 - CHx
x is no. of Input channel
A is actual input value

Set Center CH1
A=1.50 1.50

1,40ms - 1,60ms
step 0,01 ms
A is actual input value

Mix CH1 and
CH2

CH1 - CHx
x is no. of Input
channel

Mix Relation
100%

Mix Sign +

+ / -

Mix relation CH1 and CH2
0% - 200% of CH2
step 1%
1:1 = 100% = 50% CH1 and 50% CH2
2:1 = 200% = 50% CH1 and 100% CH2
1:2 = 50% = 50% CH1 and 25% CH2

Duplex Rsat2 EX
FW ver. 3.00

MeasureOrSetting
Out Pin Set

Set Output Pin
Y1

Y1 - Y18
for 18 pin outputs
RX

SetInChannel Y1
CH1

Ch1, Mix CH1,...

Reverse A Y1
Y=1.50 off

off/on
Y=actual output
value

Reverse B Y1
Y=1.50 off

off/on
Y=actual output
value

Gain A Y1
Y=1.50 100%

0% - 200%
step 1%
Y=actual output value

Gain B Y1
Y=1.50 100%

0% - 200%
step 1%
Y=actual output value

Signal Fault Y1
Fail safe

repeat/
out off/
Fail safe

Fail Safe Y1
Y=1.50 1.50 ms

0.80 ms - 2.20 ms
step 0.01ms
Y=actual output value

Delay Y1
Y=1.45 0.0 s

0s - 5s
step 0,1s

Curve Y1
linear

linear/
exponential/
logarhitmical

ATV HighLimit Y1
Y=1.50 1.80 ms

1.60 ms - 2.20 ms
step 0.01ms
Y=actual output value

ATV LowLimit Y1
Y=1.50 1.20 ms

0.80 ms - 1.40 ms
step 0.01ms
Y=actual output value

Output Trim Y1
Y=1.50 0.00 ms

-0.5ms to +0.5 ms
step 0.01ms
Y=actual output value

Output Group Y1
Y=1.50 Grp:A

Group A to Group H

Y=actual output value

MeasureOrSetting
Auto set

Preset To Setup ↔
normal

Preset To Setup ↔
MixCH1&CH2Elevon

Preset To Setup ↔
MixCH2&CH4V-Tail

A1 - used antenna
Kx - Tx channels
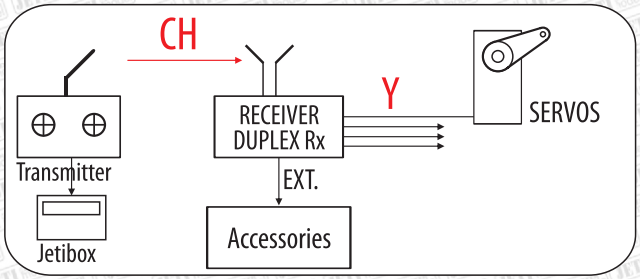
Rx Diag
A1 Kx